



Mini circuit breaker, QO, 100A, 2 pole, 120/240VAC, 10kA, plug in mount

QO2100

Product availability : Stock - Normally stocked in distribution facility



M	aı	r

Product	Miniature circuit-breaker		
Range	QO		
Current Rating	100 A		
Voltage Rating	120/240 V AC 120 V AC		
Mounting Type	Plug-in		
Number of Poles	2P		
Circuit Breaker Type	Standard		
Ratings	HACR rated		
Electrical Connection	Box lugs		

Complementary

Interrupt Rating	10 kA 120/240 V AC 50/60 Hz 10 kA 120 V AC 50/60 Hz		
Number of Panel Spaces	2		
Wire Size	AWG 4AWG 2/0 copper or aluminium		
Tightening Torque	40.71 lbf.in (4.6 N.m)		
Height	3.50 in (89 mm)		
Width	1.50 in (38 mm)		
Depth	2.91 in (74 mm)		
Net Weight	0.51 lb(US) (0.230 kg)		

Environment

Certifications	UL Listed CSA
Ambient Rating	104 °F (40 °C)

Ordering and shipping details


Category	00104-QO 35-70A 1P;70-125A 2P CB	
Discount Schedule	DE2A	

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

GTIN	785901501305			
Nbr. of units in pkg.	1			
Package weight(Lbs)	0.71 lb(US) (0.32 kg)			
Returnability	Yes			
Country of origin	MX			
Packing Units				
Package 1 Height	1.60 in (4.064 cm)			
Package 1 width	3.40 in (8.636 cm)			
Package 1 Length	3.80 in (9.652 cm)			
Offer Sustainability Sustainable offer status	Green Premium product			
Sustainable offer status California proposition 65	Green Premium product WARNING: This product can expose you to chemicals including: Cadmium and cadmium compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.			
	For more information go to www.P65Warnings.ca.gov			
REACh Regulation	REACh Declaration			
REACh free of SVHC	Yes			
EU RoHS Directive	Compliant EU RoHS Declaration			
Mercury free	Yes			
RoHS exemption information	Yes			
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.			
Halogen content performance	Halogen free product			

Warranty	18 months			
----------	-----------	--	--	--

Dimensions

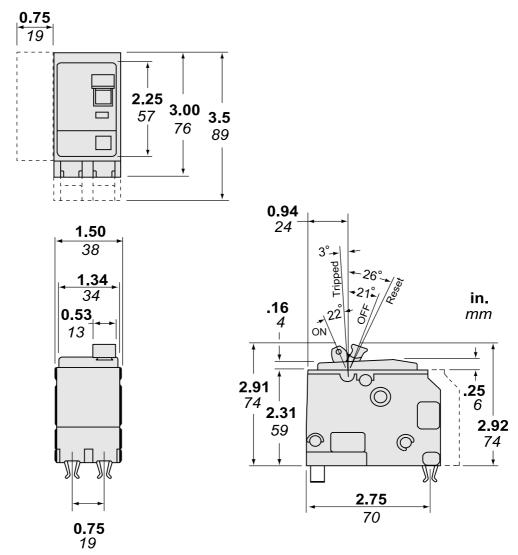

Dimensions are approximate. Refer to technical documentation for additional detail.